

THERMAL PRINTER

SAT Q22



FEATURES

- ✓ Work 24/7.
- ✓ Modern and compact design.
- ✓ Ideal solution for high traffic.
- ✓ Led paper feed indicator.
- ✓ Dual communication interface.
- ✓ Excellent print quality, 1D, 2D and grayscale barcodes.
- ✓ 1.5 million cuts

DESCRIPTION:

SAT POS solutions designed exclusively for you. Streamline, optimize and efficiently renew your processes, providing the experience that your employees need and your customers want.

We designed our Q22 printers to provide the perfect combination of elegance, versatility and reliability for your company (7x24 work).

The Q22 series offers automatic calibration function and cutting tool life update to 1.5 million, compatible with online firmware update, with ESC/POS.



Thermal printers are designed to provide the ideal compact experience offering fast printing speed.

High quality printing technology for 1D and 2D barcodes.



Its operation allows double communication interface (USB-ETHERNET) and high compatibility with POS systems.

LED paper feed indication technology without leaving aside its automatic double cutter.



Flexibility of installation, easy to install on the wall. Ideal for POS billing point-of-sale solutions.

MARKETS AND APPLICATIONS



Restaurants



Supermarkets



Point of Sale



Retail



Store



Bars



Drugstore



Airlines



Financial Institutions

*Complementary products are sold separately.




PRODUCT WARRANTY



SPECIFICATION		DESCRIPTION
Print	Print	Direct Thermal
	Opening	203Dpi
	Printing speed	Max. 230mm/s
	Printing size	80mm
Paper	Paper Type	Thermal paper
	Paper size	79.5 mm
	Paper density	0.5 mm
	Paper roll diameter	79.5
	Paper loading	Easy loading
	Thermal printhead	150k
	Paper cutting	Parcial cut
	Cutter	1.5 million cuts
	Barcodes	1D / 2D
Detection	Sensors	"Paper output, two sensors near the end of the paper, Cutter Jam Detection, Lid Open"
LED indicators	Power	Green led
	Paper	Red led
Memory	RAM	64k bytes
	Flash	256k bytes
	Cash drawer connection	1 x RJ11
Feeding Sources	AC input	CA 100V / 240V, 50 ~ 60Hz
	DC output	24V / 2.5A
Environmental Conditions	Operating temperature	((0 ~ 45 Temperature C°)) humidity (10 ~ 80%)
	Storage humidity	(-10 ~ 60) humidity (10 ~ 80%)
Dimensions	equipment dimensions	184 x 140 x 142 mm (DxWx H)
	Weight	0.76 Kg
Software	Driver	Windows XP/Vista/7/8/10/11 Mac os, Linux, Android, OPOS
	SDK	Integrated 1D and 2D code reader
	Emulation	ESC / POS

MODELS	INTERFACE	
Q22U	1xUSB	
Q22US	1xUSB	1xSERIAL
Q22UB	1xUSB	1xBLEETOOTH
Q22UE	1xUSB	1xETHERNET

DIMENSIONS

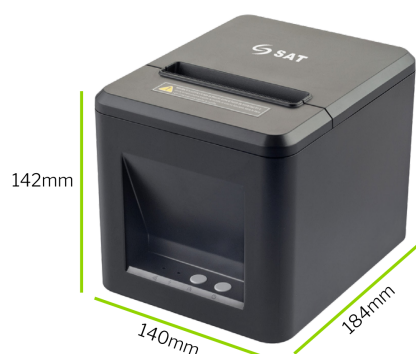

*Complementary products are sold separately.

Complementary products for a POS solution



ALL IN ONE
SAT CI150

Screen size	15"
Aspect ratio	7:3
Processor	Intel® Haswell Core™ i5
MTBF Life	50.000 Hours

Code bar scanner

SAT LD101R PLUS

Tecnology	Lineal laser
Decodification	ID
Speed	300 Scans/second



Thermal printer
SAT Q22