

THERMAL PRINTER

SAT 37T USE



FEATURES

- ✓ 24/7 operation.
- ✓ Modern and compact design.
- ✓ Barcode printing.
- ✓ Metal Structure.
- ✓ Ideal solution for high traffic.
- ✓ LED paper feed indicator.
- ✓ Triple communication interface.
- ✓ Dual automatic cutter.

DESCRIPTION:

SAT offers solutions exclusively tailored to your needs. Streamline, optimize, and effectively renew your processes, providing the experience your employees need and your customers desire.

We design our 37T USE Printers to deliver the perfect combination of elegance, versatility, and reliability for your business (24/7 operation).

The 37T USE Series provides high printing speeds of up to 300mm/s, thanks to its patented dual automatic cutter technology, while maintaining low energy consumption, energy efficiency, and environmental friendliness.



Thermal printers are designed to provide an ideal compact experience thanks to their printing speed.

High quality printing technology for 1D and 2D barcodes.



With dual communication interfaces (USB/ETHERNET), they offer seamless compatibility with POS systems, enhancing operational flexibility.

Equipped with LED paper-feed indicators and a dual auto-cutter, these printers streamline workflows while minimizing downtime.



Wall-mount flexibility simplifies installation, making them ideal for POS billing solutions in retail and high-traffic environments.

MARKETS & APPLICATIONS



Supermarkets



Restaurants



Payment points



Retail



Stores



Bars and Nightclubs



Drugstores



Airlines




Financial Institutions

*Specifications are subject to change without prior notice.

SPECIFICATIONS		DESCRIPTION
PRINTING	Printing Method	Direct Thermal
	Resolution	203 dpi / 180 dpi
	Printing width	79.5 mm
	Printing Speed	Max 300 mm/s
PAPER	Paper Type	Thermal Paper
	Paper Size	80mm
	Paper Thickness	0.6 mm to 0.8 mm
	Paper Roll Diameter	79.5+0.5mm.
	Paper Loading	Easy Load
	Print Head Lifespan	100,000 lines
	Paper Cutting	Full Cut
	Cutter Lifespan	1 million cuts
BARCODES	1D 2D	UPC-A, UPC-E, EAN8, EAN13, CODE39, ITF, CODEBAR, CODE128, CODE93, QR CODE.
DETECTION	Sensors	Paper Out, Dual Paper-End Sensors, Cover Open Detection
LED INDICATORS	Power	Green LED
	Paper	Red LED
	Error	Red LED
MEMORY	Ram	2048 KB
	Flash	256 KB
CASH DRAWER CONNECTION		1x RJ11.
INTERFACES	USB	1x USB
	Serial	1x Serial
	Ethernet	1x Ethernet
POWER SUPPLY	AC Input	AC100V-240V.
	DC Output	DC 24V/2.5A
ENVIRONMENTAL CONDITIONS	Operating Temperature	(0-45° c) humidity (10-80 %)
	Storage Humidity	10% - 90%, no condensation R.H.
DIMENSIONS	Unit Dimensions	188 x 145 x 148 mm (DxWxH)
	Weight	1.65 Kg
SOFTWARE	Driver	Windows XP/Vista/7/8/10, Linux, OPOS



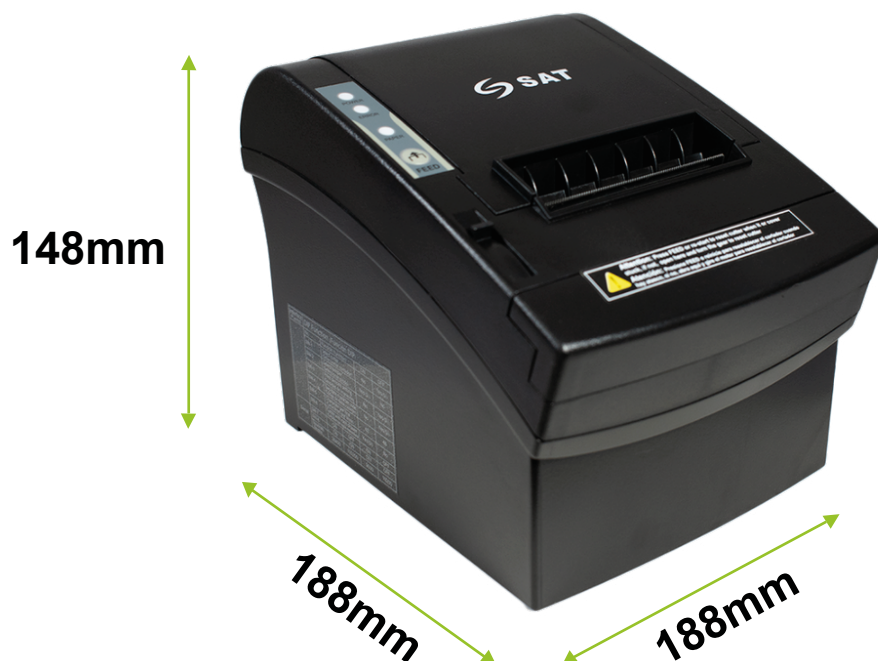

OTHER CODE READERS:



SATLD101R PLUS



SAT AI402 ID OCR

COMPLEMENTARY PRODUCTS



**AIO POS
CI150**



**POS printer
SAT 38T**



**Cash drawer
SAT 119Z**